


Strong bonds and enhanced protection for your tiles



High Performance Tile Adhesive

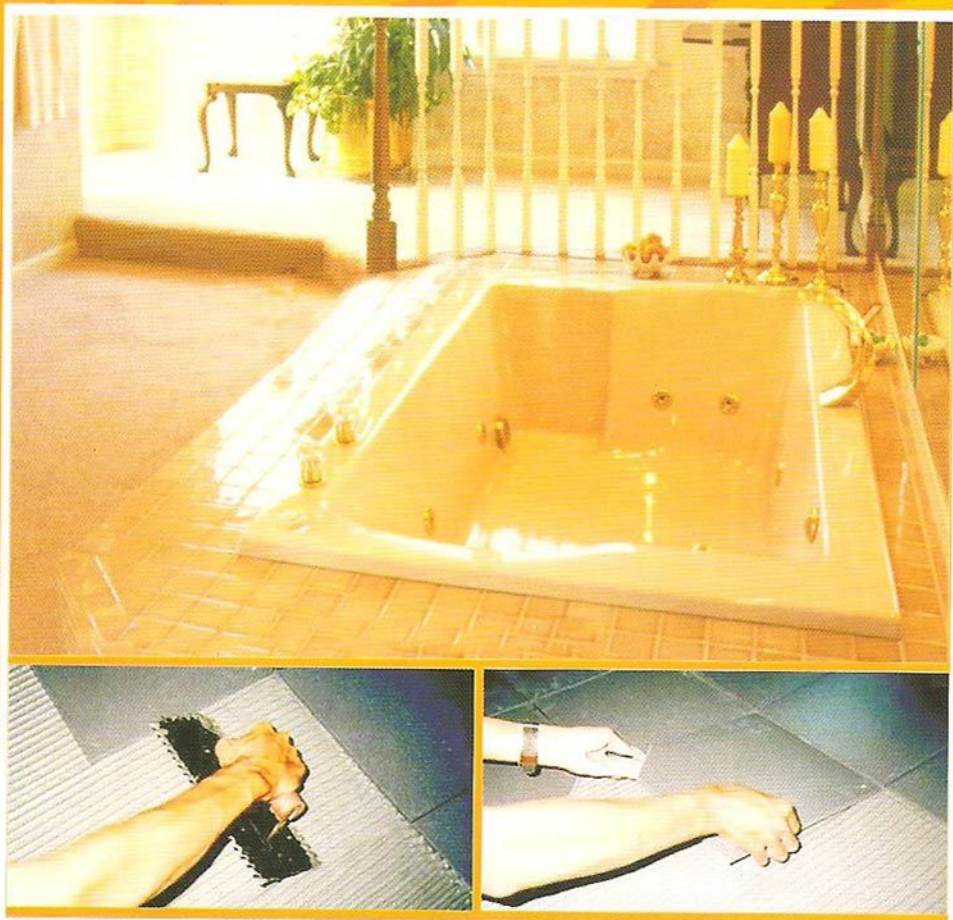

Ramco Tile Fix is a polymer-modified, cement-based, pre-packed and ready-to-use tile adhesive. It consists of Portland cement, specially graded sand, polymer and other value-added additives. Recommended as thin bed adhesive for vertical and horizontal application with good sag resistance. Ideal for top down tiling application with general tiles.

PRODUCT RANGE

- T1 For fixing standard size ceramic floor tiles.
• T2 For fixing standard size floor & wall tiles.
• T3 For fixing normal & medium porous tiles.
• T4 For fixing marble granite & Swimming pool tiles (Water Proof)
• T5 Superior adhesive for excellent bonding for all types of tiles and stones.
• T6 White colored adhesive for fixing marble & light colored stones.

SURFACE PREPARATION, MIXING & APPLICATION

Remove all deteriorated concrete, dirt, oil, grease and other bond inhibiting material from surface. Cleaning should be done by sand blasting, high pressure water blasting or other appropriate mechanical means. Pre-saturate surface with clean water. Substrate should be saturated, surface dry and free of surplus water prior to application.

Mixing procedure

Step1: Add Ramco Tile Fix gradually to the measured quantity of water - about 8.4 litres. Mix until a smooth uniform, homogenous consistency is achieved behind the tiles.

Step2: Allow the mixed tile adhesive to stand for 1-2 minutes for additive to dissolve.

Step3: Apply the mix onto walls or floor with a notched towel for sufficient work area within the open time. Lay the tiles immediately onto the fresh adhesive and firmly fix them to ensure good contact behind the tiles.

Any adjustment of files should be done within 15 minutes of installation beyond which the existing adhesive should be removed and a fresh coat of adhesive should be reapplied to the substrates.

BENEFITS

- Enhanced value for your expensive tiles
• Excellent bond strength
• Good workability
• Better open time
• Easy to use
• Anti-sagging
• No pre-shrinking of tiles

PRECAUTION : Ramco Tile Fix is non-hazardous, but due to the cemenitious nature, it is advisable to wear a filter mask and protective coating. In case of eye contact, wash copiously with water and if irritation persists seek medical treatment.

ADDITIONAL INFORMATION

Table with 2 columns: Property (Packaging, Open Time, Water Requirement, Shelf Life, Coverage, Pot Life) and Value (5/25 kg. bag, ~30 mins, ~21% by weight of dry mix content, 6 months when unopened and stored in dry conditions, ~4.5 to 5 sq.ft/kg/3mm thickness, Approximately 120 minutes after adding water to powder).



In technical collaboration with m-tec Germany

Dry Mix Division, Madras Cements Ltd., Auras Corporate Centre, 1st Floor, 98A, Dr. Radhakrishnan Salai, Mylapore, Chennai - 600 004. Tel : (044) 2847 2744, Fax : 2847 8676 e-mail : dmp@madrascements.co.in

Contact :

- Chennai : Tel - 044 28478666. Mob - 94450 09482 / 3 / 4 / 97.
Madurai : Tel - 0452 2342167. Mob - 94450 09498 / 94450 08190.
Bangalore : Tel - 080 40750000 / 04 05. Mob - 99000 16104 / 05 / 06 / 16.
Cochin : Tel - 0484 2374783. Mob - 94465 77702 / 94460 06299 - 94460 02239.
Hyderabad : Tel - 040 23119271 / 72, Fax : 040 23119273.
Mob - 98499 12321 - 98499 12306.

